


Model 510-E4 Spider

+ jib m.2,50 - + jib m. 4,50




K e g i o m
l i f t i n g

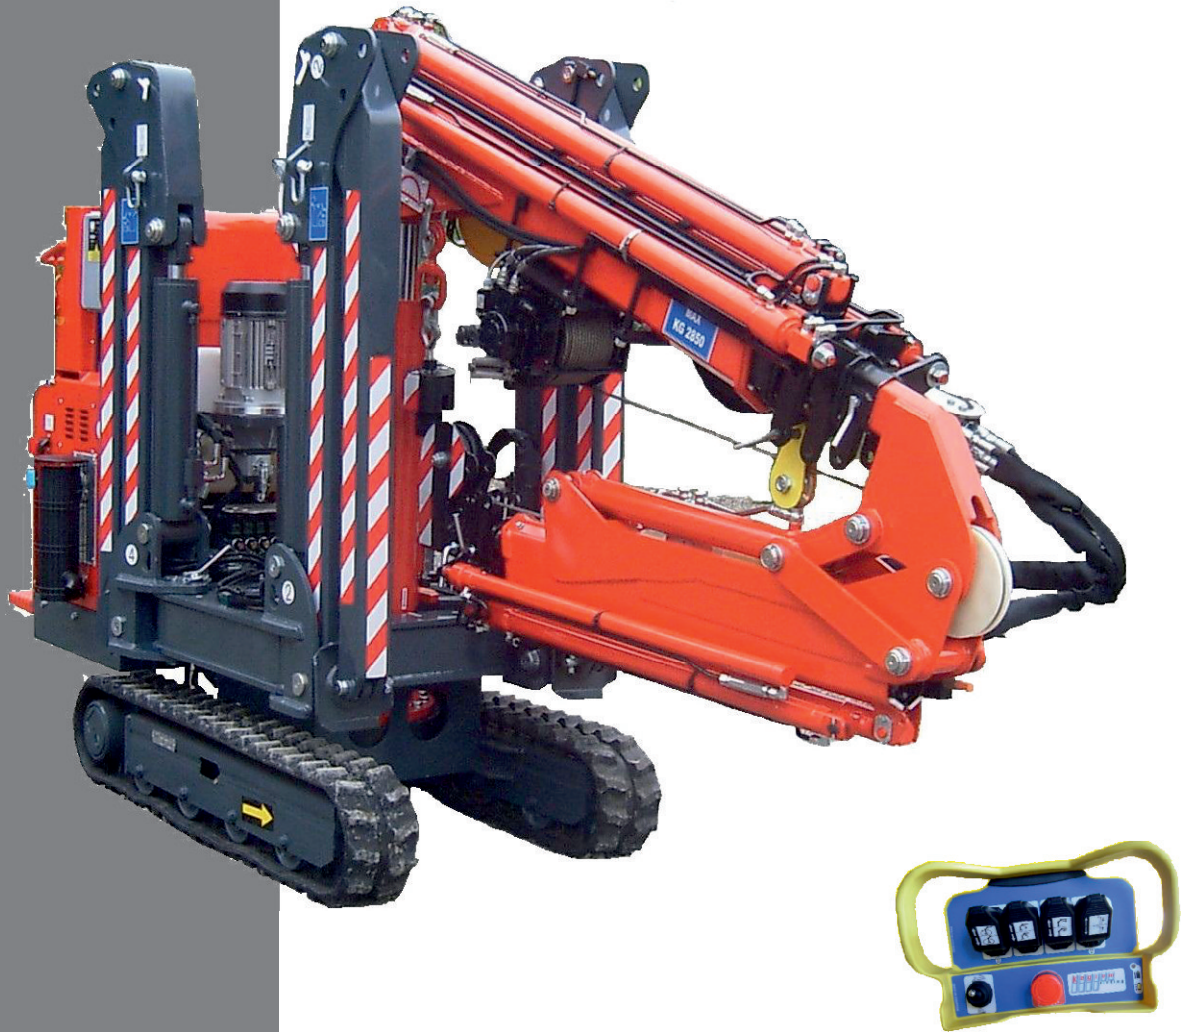

gru . crane . kran . grue . daru . guindaste

Dimensioni Generali - General Dimensions - Dimensions Générales
Általános méretek

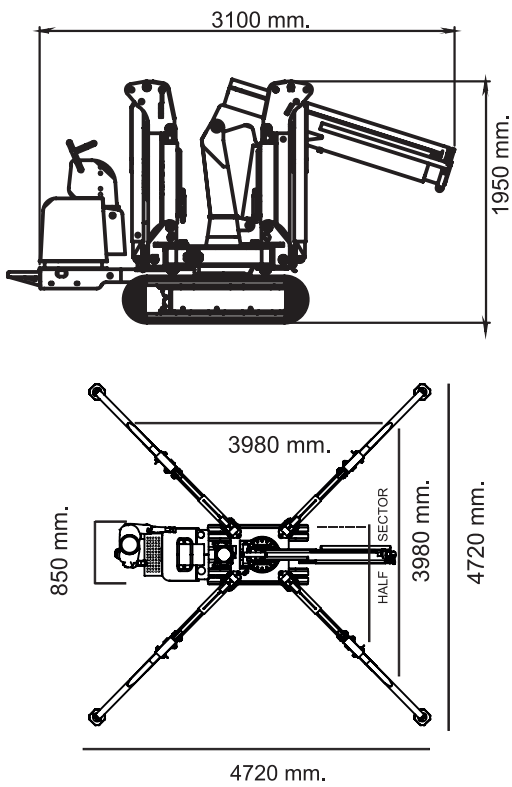

PUÒ SALIRE E SCENDERE DAL VEICOLO DI TRASPORTO CON GLI STABILIZZATORI
SELF-LOADING/UNLOADING ON THE TRUCK WITH OUTRIGGERS.
KANN STEIGEN UND ERHALTEN VOM TRANSPORTFAHRZEUG MIT DEN STABILISATOREN DES KRAN
PEUT MONTER ET DESCENDRE DU VÉHICULE DE TRANSPORT GRÂCE À SES STABILISATEURS
ONALLO FEL/LEÁLLÁS A SZÁLLÍTÓJÁRM R L



Tabella portata con Jib m.2,50
Lifting Capacity Chart with Jib m.2,50
Tableau de Charge avec Jib m. 2,50
Hablastabelle mit Jib m.2,50
Tablero de Carga con Jib m. 2,50















Tabella portata con Jib m.4,50
Lifting Capacity Chart with Jib m.4,50
Tableau de Charge avec Jib m. 4,50
Hablastabelle mit Jib m.4,50
Tablero de Carga con Jib m. 4,50

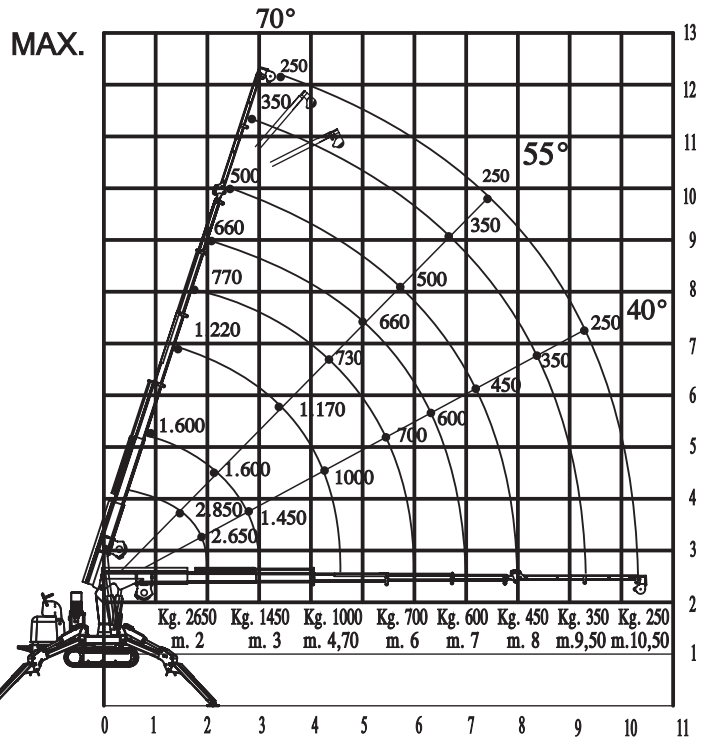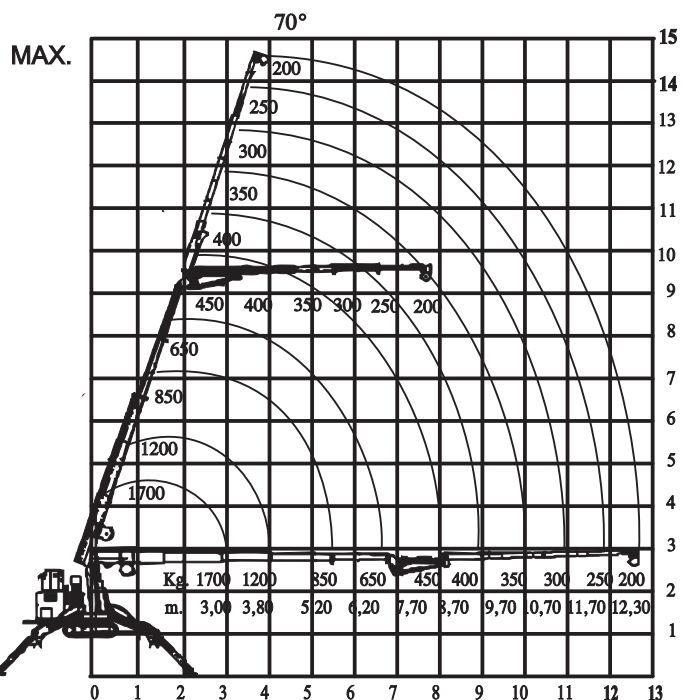

DATI TECNICI TECHNICALS SHEETS TECHNISCHE DATEN CARACTERISTIQUES TECHNIQUES DATOS TECNICOS


						
Elektromos indítású benzinmotor	Motore benzina avviamento elettr.	Motor petrol electric starting	Benzinmotor Elektrostarter	Moteur à essence démarrage élect.	Motor gasolina arranque elctr.	Honda Gx690 22HP a 3600 rpm
Üzemanyagtank	Capacità serbatoio	Tank capacity	Trankkapazität	Capacité réservoir	Capacidad tanque	10 l.
2 sebességű hidrosztatikus hajtásrendszer	Trazione idrostatica a 2 velocità	Drive system hydrostatics to 2 speeds	Hydrostatischer Antrieb mit 2 Geschwindigkeiten	Transmission hydrostatique à deux vitesses	Tracciòn hidrostàtica a 2 velocidades	Km/h 2,6 4,0
Rámpaszög	Angolo di rampa	Ramp angle	Steigungswinkel	Rampe admissible	Rincòn de tramo	20° (36.4%)
Gumiheveder	Cingoli in gomma	Tracks in rubber	Raupenkettens aus Gummi	Chenilles en caoutchouc	Orugas de goma	1222 x 180 x 20 mm.
Max. emelés	Portata max	Max lifting	Max. Tragfähigkeit	Capacité maximum	Carga máxima	2850 Kg.
Max elérés	Sbraccio massimo	Max working radius	Max.Ausladung	Longueur de flèche max	Alcance lateral máx.	10,50/12,30 m.
Max. emelési magasság	Altezza massima	Max.working height	Tragfähigkeit bei max.Ausladung	Hauteur de levage max.	Altura max. de trabajo	12 m. /14 m.
Csőr kábel	Fune	Winch rope	Seil	Câble	Cable	40 m. ø 8mm.
Fordulási képesség	Rotazione	Rotation	Umdrehung	Rotation	Rotaciòn	360°
Kitalpalás	Stabilizzatori	Outriggers	Abstützung	Stabilisateurs	Estabilizadores	Hydraulic multi position
Max. Talajnyomás	Pressione al suolo	Max track loading	Bodendruck	Pression au sol	Presiòn de apoyo	0,45 Kg/cm ²
Pótméteres elektromos vezérlés	Comandi elettrico proporzionali	Electricals proportionals control	Elektrische proportionale Steuerung	Commandes électriques proportionnelles	Mandos eléctricos proporcionales	
Automatikus határoló elektromos	Limitatore di momento	Automatic limiting device	Automatische Grenzlastregelung	Limiteur de charge	Limitador de momento	Elektronico - Electronic Elektronisch - Électronique Electrónico
Max nyomás	Pressione max	Max pressure	Max Betriebsdruck	Pression max	Max Presiòn	200 bar
Daru méretei	Dimensioni Gru	Dimensions crane	Abmessungen Kran	Dimensions de la grue	Dimensiones grúa	3100 x 850 x 1950 mm.
Tömeg	Peso	Weight	Gewicht	Poids	Peso	1980 Kg.
Jib tömege m. 2,50 m. 4,50	Peso Jib m.2,50 m.4,50	Weight Jib m.2,50 m.4,50	Gewicht Jib m.2,50 m.4,50	Poids Jib m.2,50 m.4,50	Peso Jib m.2,50 m.4,50	35 Kg. 140 Kg.

OPTIONALS

	Verricello Winch Treuil Seilwinde Csőrlo		Elettropompa 115-220-380 V Electric pump 115-220-380 V Pompe électrique 115-220-380 V Elektrische Pumpe 115-220-380 V Elektromos szivattyú 115-220-380 V		Radiocomando Radio remote control Radiocommande Funkfernsteuerung Rádiós távirányító		Cestello Basket Nacelle Personenkorb Emel kosár
	Prolonghe meccaniche Manuels extensions Rallonges manuelles Manuelle verlängerung Mechanikus hosszabbítók		Allargamento idraulico cingoli mm. 750/1050 Widening hydraulic tracks mm. 750/1050 Élargissement hydraulique des chenilles mm. 750/1050 Hydraulisch ausfahrbare raupenkettens mm. 750/1050 Hidraulikus nyomtávallítás mm. 750/1050		Sollevatore a ventosa portata max +0 400 - 1200 Kg Vacuum lifter max lifting +0 400 - 1200 Kg élevateur à vide carga maxima +0 400 - 1200 Kg levantador de vacío capacidad max +0 400 - 1200 Kg Szívókorong max emelés +0 400 - 1200 Kg		



Keresked

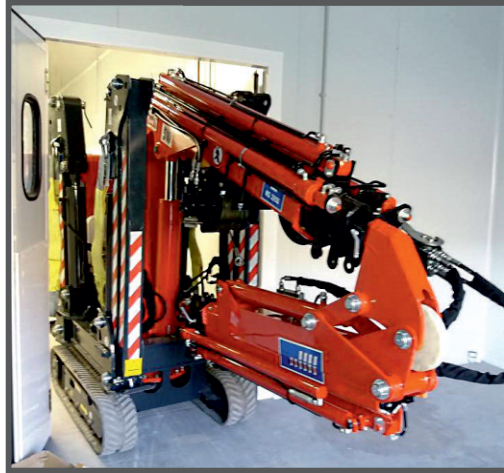

Kegiom Lifting S.r.l. - Via Duchessa di Galliera, 12
15076 Ovada (AL) - Italy
Tel./Fax (+39) 0143 822031 - 46541
e-mail: info@kegiom.com - web: www.kegiom.com
C.F. e P. Iva 01956070062 - C.C.I.A.A. Alessandria n. 213887

Kegiom si riserva il diritto di apportare qualsiasi modifica senza preavviso nè responsabilità.
Kegiom reserves the right to make changes without prior notice or responsibility.

